

Sirindhorn International Institute of Technology Thammasat University

Midterm Examination: Semester 1/2007

Course Title : ITS 323 – Introduction to Data Communications

Instructor : Dr Steven Gordon

Date/Time : Thursday 19 July 2007, 9:00 – 12:00

Instructions:

- ③ This examination paper has 19 pages (including this page).
- ③ Condition of Examination
Closed book (No dictionary, **Non-programmable calculator allowed**)
- ③ Students are not allowed to be out of the exam room during examination. Going to the restroom may result in score deduction.
- ③ Turn off all communication devices (mobile phone etc.) and leave them under your seat.
- ③ Write your name, student ID, section, and seat number clearly on the answer sheet.
- ③ The space on the back of each page can be used if necessary.
- ③ Unless stated in the question, you can assume the speed of transmission is 3×10^8 m/s

Part A - Multiple Choice Questions [30 marks]

Select the most accurate answer (only select one answer). Each correct answer is worth 2 marks.

1. Computer A sends 8 bits of data plus a single even parity bit (as the first bit) to Computer B. A single bit error occurs during the transmission. Computer B receives the bits 000011010. Which of the following is *true*?
 - a) The original 8 bits of data was 00011010
 - b) The original 8 bits of data had an even number of 1's
 - c) The original 8 bits of data had an odd number of 1's
 - d) The transmitted parity bit had a value of 1
 - e) The transmitted parity bit had a value of 0
 - f) The receiver cannot detect the error
 - g) The receiver cannot determine the original 8 bits of data

2. The data link layer in the Internet layered model:
 - a) Defines user friendly addresses like URLs and email addresses
 - b) Converts digital data into electromagnetic energy for transmission
 - c) Selects paths across multiple networks
 - d) Aims to provide error-free transmission across links
 - e) Does not include an addressing scheme

3. According to the free-space propagation model, increasing the size of the transmit antenna (while maintaining all other parameters at the transmitter) will:
 - a) Increase the power lost between transmitter and receiver
 - b) Increase the received power
 - c) Increase the frequency used in transmission
 - d) Reduce the distance that can be transmitted
 - e) Reduce the gain of the transmit antenna
 - f) Reduce the gain of the receive antenna

4. Unshielded twisted pair:
 - a) Can be used to transmit over longer distance than optical fibre
 - b) Provides higher data rates than coaxial cable
 - c) Is easier to install than coaxial cable
 - d) Is affected less by interference from other twisted pairs, than optical fibre
 - e) Is no longer used because of the low data rates
 - f) Carries light waves across glass fibres

5. A transmission system that provides half-duplex communications between A and B:
 - a) Only allows A to send to B
 - b) Only allows B to send to A
 - c) If A is sending to B, then B cannot send to A at the same time
 - d) If A is sending to B, then B can send to A at the same time
 - e) Allows both A and B to transmit to each at the same time

6. If a signal has a period of 5 milliseconds (ms), then its wavelength is:
 - a) 200 m
 - b) 1500 m
 - c) 200 Hz
 - d) 1.5 MHz
 - e) 1500 km
 - f) 200 km
 - g) 1500 Hz

7. You use Skype (a voice over Internet program) on your computer to talk to a friend. Your computer is connected to your friend's computer via the fixed, land-based telephone network. The transmission is an example of:
 - a) Sending digital data on a digital signal
 - b) Sending analog data on a digital signal
 - c) Converting analog data to digital data, and sending digital data on an analog signal
 - d) Converting analog data to digital data, and sending digital data on a digital signal
 - e) Converting digital data to analog data, and sending analog data on an analog signal
 - f) Converting digital data to analog data, and sending analog data on a digital signal

8. TCP (the Transmission Control Protocol) is a common transport layer protocol used in the Internet. It would normally be implemented:
 - a) As part of the operating system
 - b) In an Ethernet or Wireless LAN card
 - c) As part of web browser (e.g. Firefox, Internet Explorer)
 - d) As part of a new application (such as file sharing or instant messaging)
 - e) In hardware to perform transmission of bits as analog or digital signals

9. TCP uses which of the following address types:
 - a) Application specific addresses (e.g. an Instant Messaging addresses)
 - b) Physical addresses
 - c) URLs such as www.google.com
 - d) Data link layer addresses
 - e) Port numbers, such as port 80 for a web server
 - f) Hardware addresses

10. What is the maximum data rate of a 4MHz channel if the signal to noise ratio is 18dB? (The answer is in the nearest Mb/s)
 - a) 48 Mb/s
 - b) 24 Mb/s
 - c) 17 Mb/s
 - d) 4Mb/s
 - e) 2Mb/s
 - f) 19Mb/s

11. If a transmission system uses 8 voltage levels to transmit a digital signal, then how many bits does each signal level represent?
- a) 1
 - b) 2
 - c) 3
 - d) 4
 - e) 8
 - f) 16
 - g) 128
 - h) 256

12. What layers are in the OSI layered model, but not in the Internet layered model:
- a) Hardware, Transport
 - b) Hardware, Session
 - c) Transport, Session
 - d) Hardware, Presentation
 - e) MAC, Presentation
 - f) Presentation, Session
 - g) MAC, Session
 - h) MAC, Transport
 - i) Hardware, MAC

13. If ten packets sent in a computer network experience the delays as given below, then the jitter is:

Packet	1	2	3	4	5	6	7	8	9	10
Delay (ms)	13	6	4	11	10	9	5	8	8	6

- a) 3 ms
 - b) 4 ms
 - c) 8 ms
 - d) 9 ms
 - e) 10 ms
 - f) 13 ms
14. A simple internet router:
- a) Implements only the physical layer in the Internet layered model
 - b) Implements only the physical layer and data link layer in the Internet layered model
 - c) Implements only the application layer in the Internet layered model
 - d) Will have more than one physical layer interface
 - e) None of the above
15. Which of the following is an example of a logical address:
- a) www.siit.tu.ac.th
 - b) steve@siit.tu.ac.th
 - c) 00:17:31:7E:50:7D
 - d) 125.61.3.28
 - e) None of the above

Part B – General Questions [90 marks]


Question 1 [18 marks]

The following sequence of bits are to be transmitted across a link.


0 1 1 1 0 1 0 0 1 1 0 1

Consider the following options for transmitting the bits.


- a) The bits are to be sent over a digital signal using Non-Return to Zero Invert on Ones (NRZI) encoding. Complete the digital waveform below. The value of the first bit is shown. [3 marks]

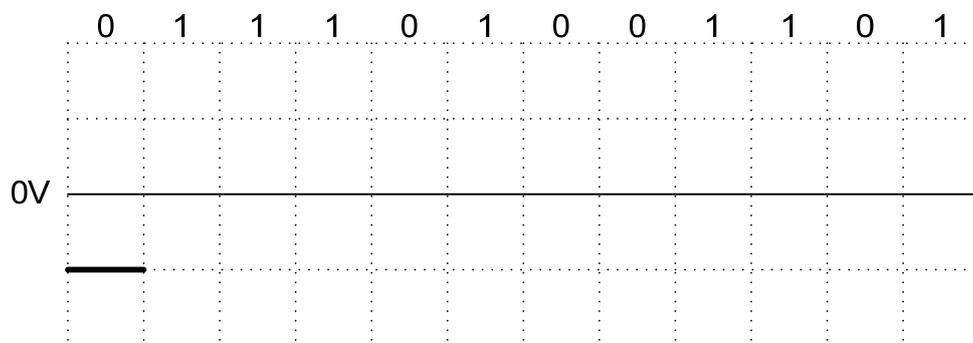


- b) The bits are to be sent over a digital signal using Bipolar Alternative Mark Inversion (AMI) encoding. Bipolar AMI has the following rules:
 0 = no line signal
 1 = positive or negative level, alternating for successive ones
 Complete the digital waveform below. Assume that the previous 1 bit has negative voltage. [5 marks]

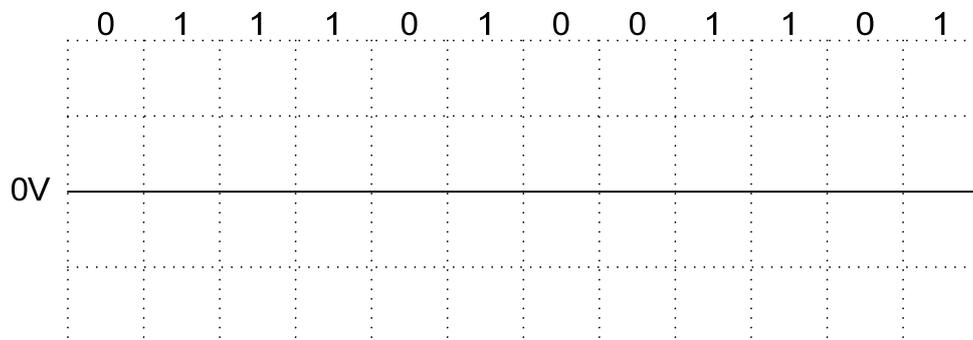

- c) The bits are to be transmitted over an analog signal using Binary Phase Shift Keying (BPSK). Complete the analog waveform below. The value of the first bit is shown. [3 marks]

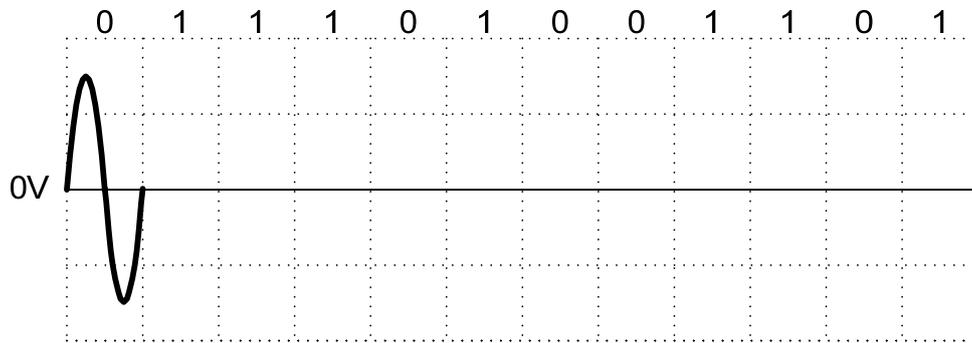

- d) The bits are to be transmitted over an analog signal using a combination of Binary Amplitude Shift Keying and Binary Frequency Shift Keying. Complete the analog waveform below. [5 marks]

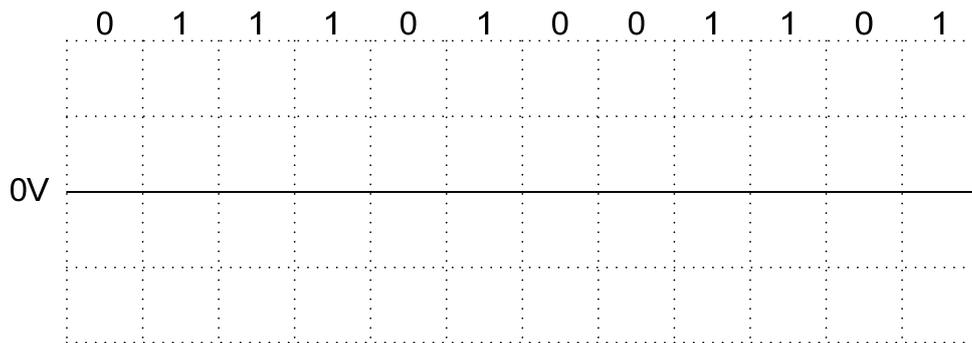

- e) Explain the encoding scheme you used in part (d). [2 marks]

Question 2 [16 marks]

Consider a forward error correcting (FEC) coder that maps 3 bits of data to the codewords in Table 1.

<i>Data</i>	<i>Codeword</i>
000	000000
001	001011
010	010010
011	011001
100	100001
101	101011
110	110011
111	111100

Table 1: Forward error correcting coder

The decoder uses the minimum Hamming distance to perform error correction.

Consider the following cases:

- a) The transmitter uses the FEC coder to send the data 010. If a single bit error occurs on the final bit of the transmitted data, explain the steps the receiver takes on receiving the data, and give the result at the receiver. [5 marks]

- b) The transmitter uses the FEC coder to send the data 010. If two bit errors occur, one on the first bit and one on the final bit of the transmitted data, explain the steps the receiver takes on receiving the data, and give the result at the receiver. [4 marks]
- c) If a 54Mb/s data rate link is used with this FEC codec, what is the maximum throughput that can be achieved? [2 marks]
- d) Explain how the FEC codec could be change to increase the efficiency of the transmissions. [2 marks]
- e) What is the advantage of increasing the codeword length for the FEC from 6 to 8 bits (while keeping the data length to 3 bits)? Explain why. [3 marks]

Question 3 [12 marks]

Analog data represented by Figure 1 is to be sent as a digital signal using Pulse Code Modulation (PCM). The analog waveform can be shown in the frequency domain as Figure 2.

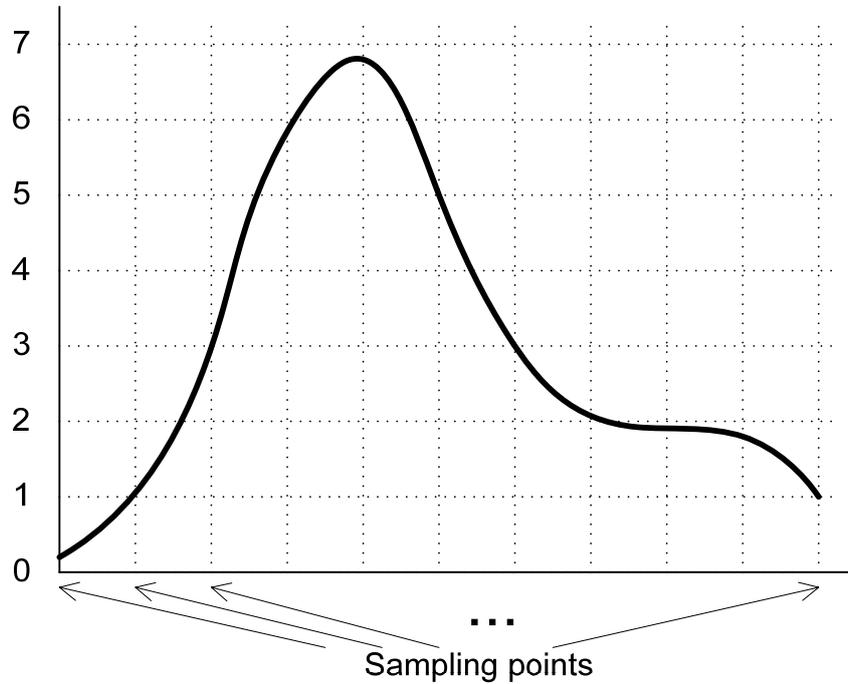


Figure 1: Analog signal

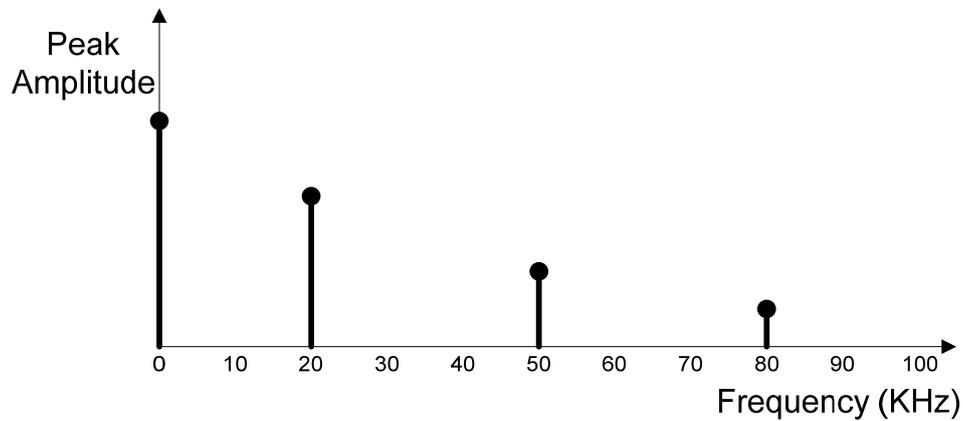


Figure 2: Analog signal in frequency domain

- a) What is the bandwidth of the analog data? [2 marks]

- b) What minimum sampling rate should be used to convert the analog data into discrete values? [2 marks]
- c) Assume the analog data is sampled at the 11 vertical lines shown in Figure 1. The signal is sampled at integer levels, from 0 to 7. Each level is converted to its corresponding 3 bit number. What is the digital (binary) data to be sent on the digital signal after sampling? [5 marks]
- d) After sampling, what is the data rate required to send the digital data? [3 marks]

Question 4 [8 marks]

Consider the network in Figure 3 where computer A is to send a 2000 byte message to computer B via optical fibres and satellite links. Assume the following:

- A geostationary satellite orbits the Earth at an altitude of 36,000km.
- The transmission speed from Earth to satellite is 3×10^8 m/s
- The transmission speed over optical fibre is 2×10^8 m/s
- There is a processing delay at each gateway of $10\mu\text{sec}$. There is also a processing delay of $5\mu\text{sec}$ at the satellite. There is no processing delay at the end computers.
- There is a queuing delay at each gateway of $5\mu\text{sec}$. There is no queuing delay at the end computers or on the satellite.

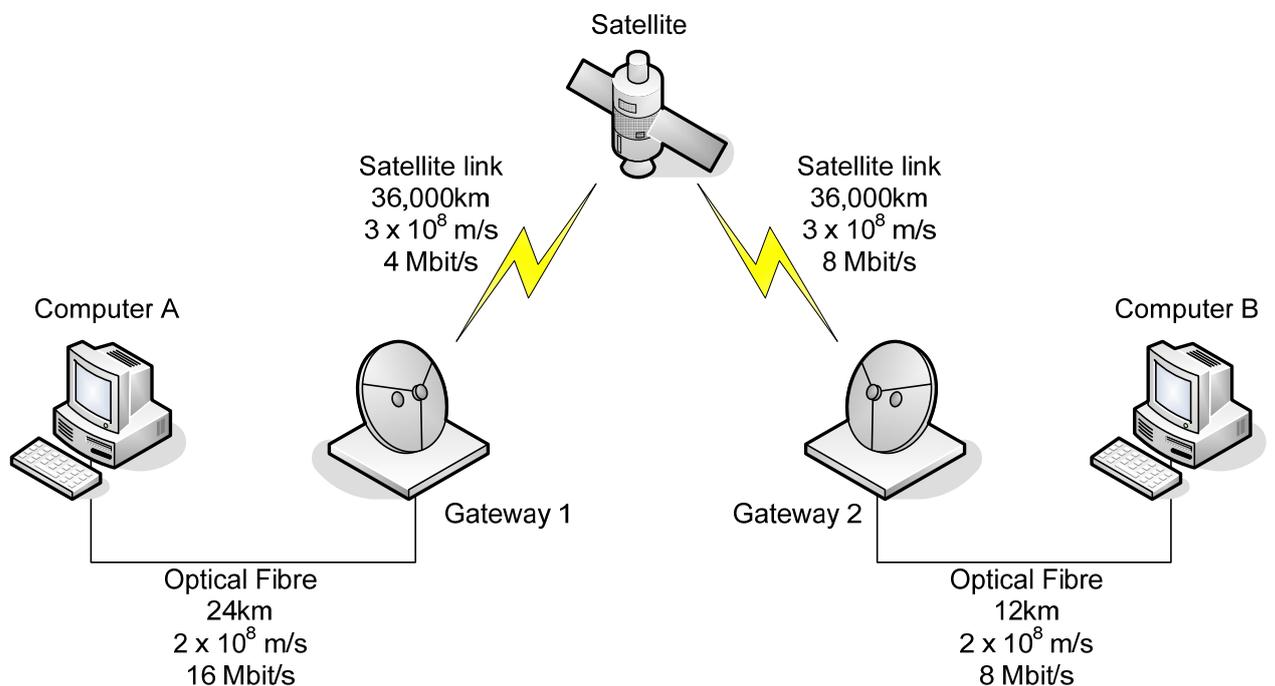


Figure 3: Satellite network

- a) What is the total delay for sending the message from Computer A to Computer B? Give your answer in microseconds (μs). [5 marks]

- b) If Stop and Wait flow control protocol was used by the transport layer between A and B, would it be efficient? Explain your answer. [3 marks]

Question 5 [13 marks]

Consider the network in Figure 4 where frames are generated at node A and sent to node C through node B. Assume the following:

- The data rate between A and B is 100Kb/s
- The propagation delay is $5\mu\text{s}/\text{km}$ for both lines
- There are full duplex lines between the nodes
- All data frames are 1000 bits long; ACK frames are separate frames of negligible length (that is, you can assume the transmission time of an ACK is 0)
- Between A and B, a sliding window flow control protocol with window size $W=3$ is used.
- In the sliding window protocol, the receiver sends an ACK for every frame received (and there is no processing delay)
- Between B and C, stop and wait flow control is used.
- There are no errors.

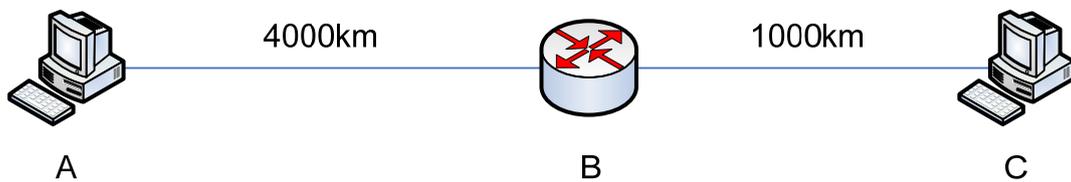


Figure 4: A to C via B

Figure 5 gives an example of a single frame being sent from B to C using Stop and Wait flow control.

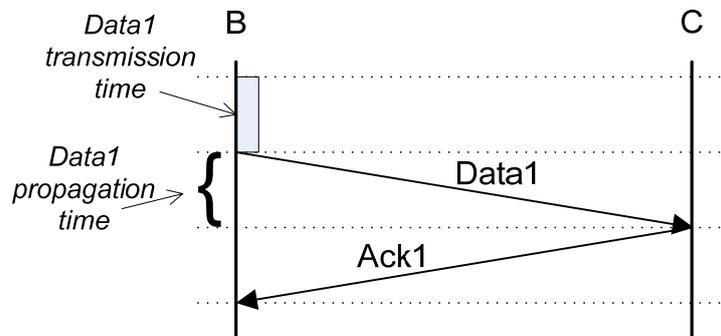


Figure 5: B to C using Stop and Wait

- a) Complete the diagram in Figure 6 that illustrates the maximum transmission rate using the sliding window when sending 6 data frames from A to B. Use the same format as Figure 5. Draw the diagram to scale – the horizontal vertical lines are in 10ms intervals. [6 marks]

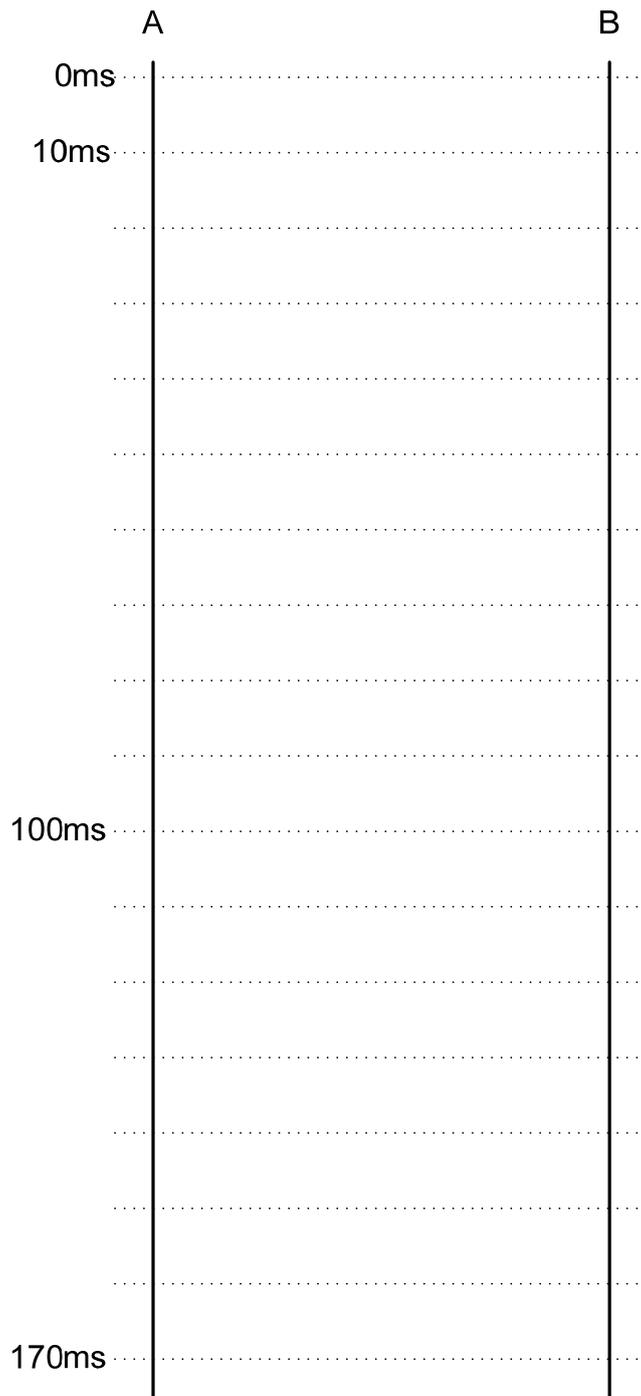


Figure 6: A to B using Sliding Window

- b) Determine the minimum data rate required between nodes B and C so that the buffers at node B are not flooded. [Hint: In order to not flood the buffers of B, the average number of frames entering and leaving B must be the same over a long interval. Use your answer from part (a) to work out the rate of frames entering B.] [7 marks]

Question 6 [10 marks]

Figure 7 and Figure 8 show a portion of the signals $s_1(t)$ and $s_2(t)$, respectively.

- a) For each signal, calculate the maximum data that can be achieved if the system bandwidth is limited to 24MHz. You can assume only 2 signaling levels are used. [8 marks]

$$s_1(t) = \sin(2\pi ft) + \frac{1}{3} \sin(2\pi 3ft) + \frac{1}{5} \sin(2\pi 5ft)$$

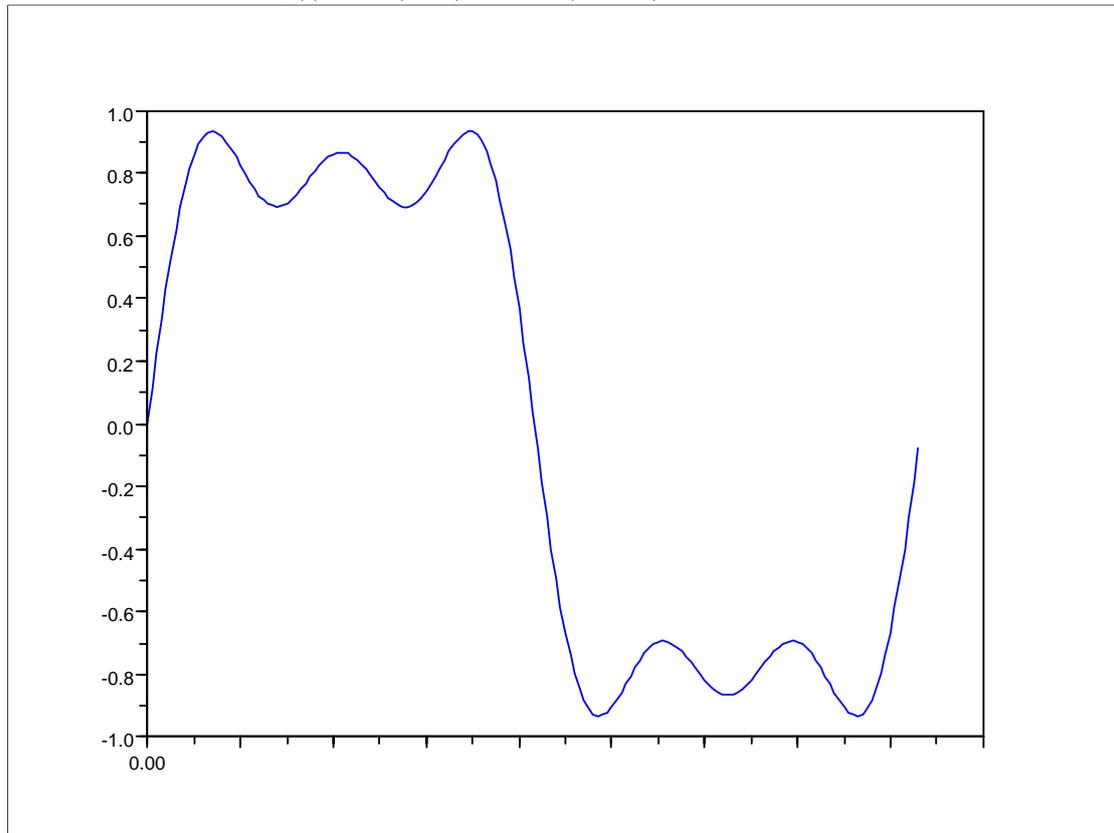


Figure 7

$$s_2(t) = \sin(2\pi ft) + \frac{1}{3} \sin(2\pi 3ft) + \frac{1}{5} \sin(2\pi 5ft) + \frac{1}{7} \sin(2\pi 7ft) + \frac{1}{9} \sin(2\pi 9ft)$$

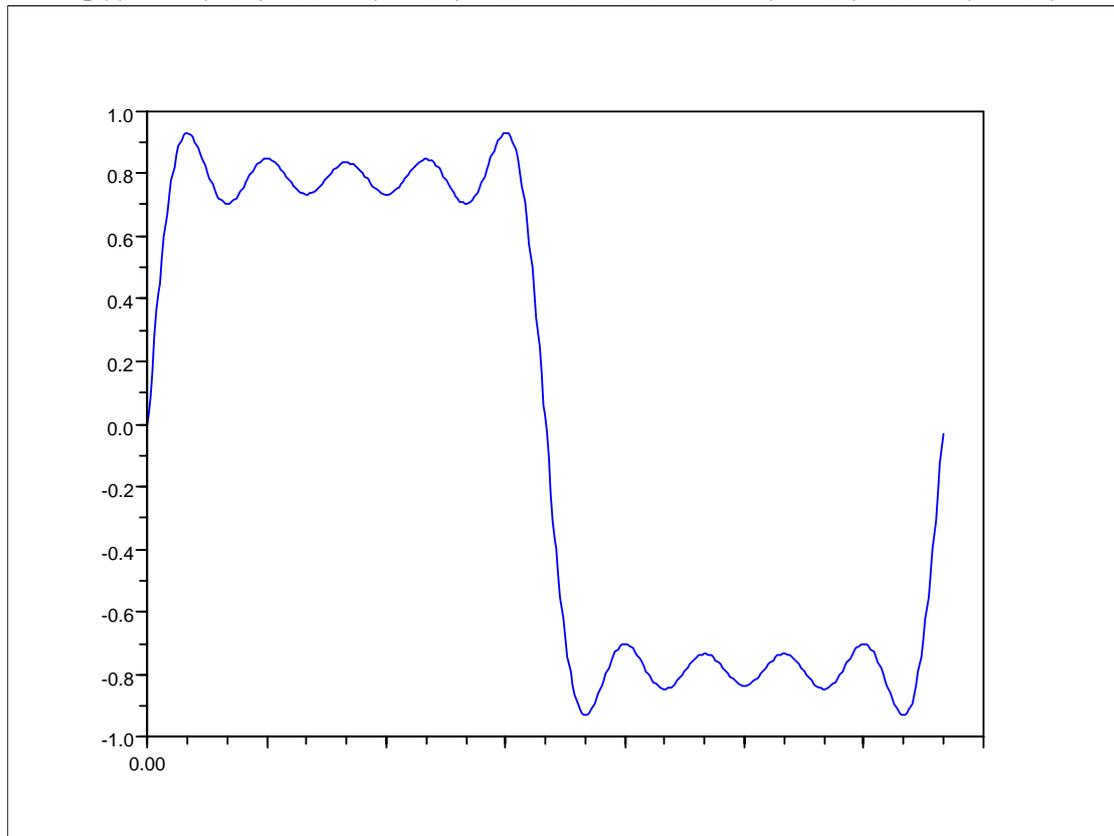


Figure 8

b) What is an advantage of $s_2(t)$ compared to $s_1(t)$? [2 marks]

Question 7 [6 marks]

You want to design a home network to connect several High Definition Television (HDTV) devices together (e.g. TVs, receiver, digital recorders, computer). The specifications of HDTV are:

- The image resolution is 1920 x 1080 pixels
 - Screen refresh rate is 30 images per second
 - 24-bit colour is used; each pixel is represented by 24-bits.
- a) What is the data rate required to transmit the HDTV data between devices?
Give your answer to the nearest Mb/s. [3 marks]

- b) What is the minimum number of signaling levels required if the HDTV is to be transmitted over a 75 MHz noise-free channel? [3 marks]

Question 8 [7 marks]

You design a new, simple layered protocol architecture for connecting two computers that uses only 3 layers, called (from bottom to top): Physical, Network, Application.

The main role of each layer is (from the sender's point of view):

- Application layer receives the user data (e.g. files, web page requests and responses) and adds a 5 byte header to indicate the destination.
- Network layer receives data from the Application layer, and breaks it into packets no larger than 100 bytes. It then adds a 10 byte header for addressing and other control information.
- Physical layer takes each Network layer packet, breaks it into 80-bit frames, adds a 16-bit Cyclic Redundancy Check (CRC) code and transmits the signal to the receiver. If a packet does not contain an integral number of 80-bit frames, then the Physical expands the last frame to 80-bits (for example, by padding it with 0's).

If the user wishes to send a 100KB file using the protocol stack, what is the throughput if the Physical layer data rate is 1Mb/s?